



## Global radiation measuring head type 3.7

### Global radiation

All diffuse and direct solar radiation reaching the surface of the earth is called global radiation. It ranges from short (300nm (UV-B) ) to long (5000 nm (IR)) wavelength.


### Global measuring head type 3.7

The sensor detects almost 90% of sunlight in the wavelength range between 400 nm and 1100 nm and is covering the range of the uv-, vis- and some of the ir-light.

The measuring results are allowing conclusions about medical and biological connections by comparing to other spectral ranges.

The measuring head can be used in medical and biological research, in weather information and forecast systems, in climate research, in agriculture and for public information in general.

The measuring head type 3.7 has a weatherproof aluminum housing. The results are cosine corrected. The dome is made of glass. This device can be equipped with 4 different output signal variations.

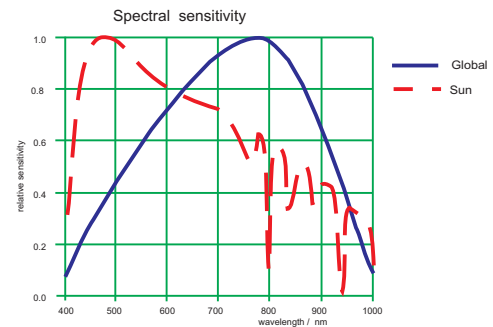

### Technical specifications


Measuring range global	0 - ca. 1300 W/m <sup>2</sup>
Spectr. sensitivity	400 nm - 1100 nm
Max. spectral sensitivity	780 nm
Working temperature	-20°C - +60°C
Signal output	0V - 5V/0V-10V*/
Power supply	4mA-20mA/0mA-20mA** +9V - +24V/*+14V-+24V **RL(0-100Ohm)

Installation  
2 screws M4  
in the bottom  
downward

Connector cable	
Diffusor material	PTFE
Dome material	opt. Glass
Cosine correction	error f2 < 3%
Linearity	< 1%
Abs. error	< 10 %
Dark voltage (E=0)	< 10 mV
Weight	ca. 300 g

Specifications are subject to change without prior notice.

Dimensions:



Indium Sensor  
Virchowstr. 7  
D - 15366 Neuenhagen  
Tel: (03342) 80239  
Fax: (03342) 207886